




**UN Approved Intermediate Bulk Container for Waste Fuel**

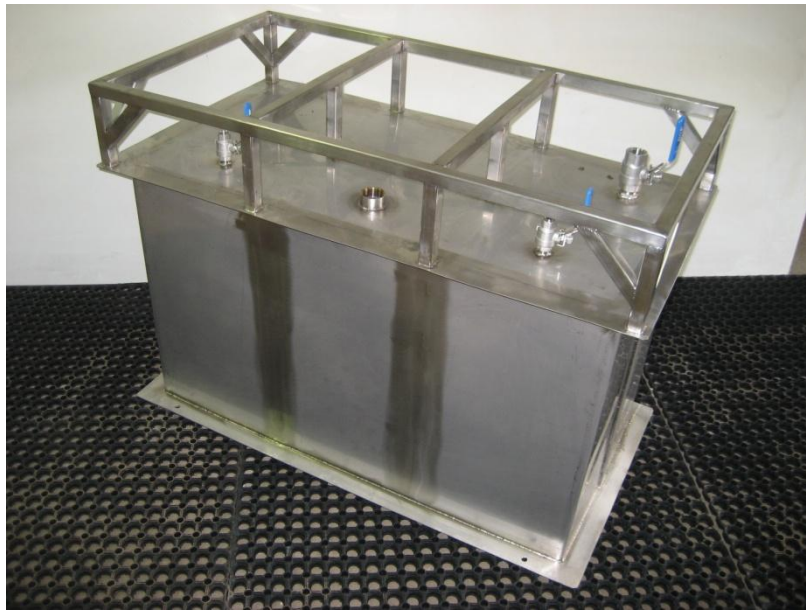

<b>UN Group</b>	31A	
<b>Packing Groups</b>	II and III	
<b>Material</b>	2mm, 304 grade stainless steel	
<b>Capacity</b>	<b>Nominal:</b> 280 Litres <b>Brim:</b> 300 Litres	
<b>Dimensions</b>	<b>Internal</b>	<b>External</b>
<b>Height</b>	600 mm	770 mm
<b>Length</b>	1000 mm	1100 mm
<b>Width</b>	500 mm	600 mm
<b>Inlet</b>	1" BSPF with isolation valve	
<b>Drain</b>	1" BSPF with isolation valve	
<b>Vent</b>	1" BSPF with isolation valve	
<b>Level Sensor</b>	1 ¼" BSPF – sensor and gauge inc	
<b>Tare Weight</b>	95 Kg	
<b>Max Gross Mass</b>	351 Kg	
<b>Internal Pressure</b>	200 KPA (hydraulic)	